


## FILTERING CARTRIDGES WITH COMPRESSION SEALING

The filtering cartridges described in this page, once installed on their container, are able to retain the impurities and dust contained in the sucked fluid, interfering with the vacuum pump or generator capacity in a negligible manner.

They are produced with different materials that can be identified with the following abbreviations:

- Series SP. Pleated paper filtering cartridge with compression sealing.
- Series SS. Pleated polypropylene mesh filtering cartridge with compression sealing.
- Series SA. AISI 304 stainless steel mesh filtering cartridge with compression sealing.

The number after the article indicates the length in inches of the filtering cartridge.

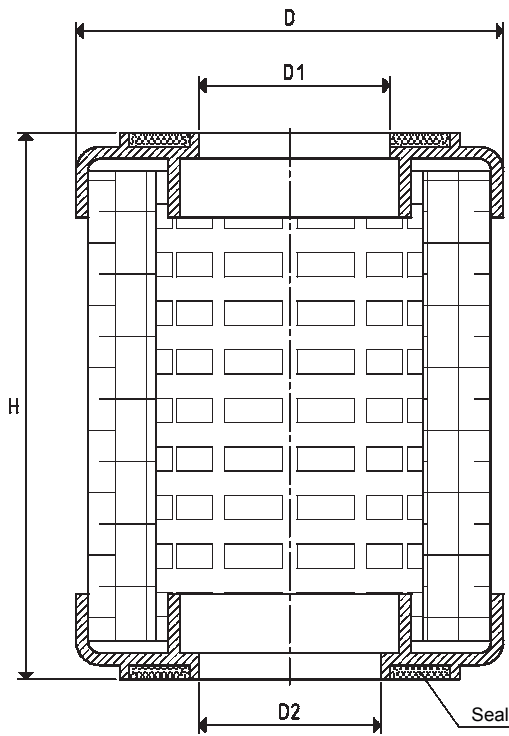

Art.	D Ø	D1 Ø	D2 Ø	H	Length	Container art.	Filtering degree micron
SP/4	70	30	30	98	4"	FP 25/4 - FP 30/4	25
SS/4	70	30	30	98	4"	FP 25/4 - FP 30/4	50
SA/4	70	30	30	98	4"	FP 25/4 - FP 30/4	50