



## Features:

- Preset timer, Pushwheel setting
- 3 digits, 7 segment LED display
- 2 C/O output

Size: 1/16 DIN 48mm X 48mm

## Technical Specifications

### Input Specifications

Accuracy	Setting: $\pm 0.05\%$ of set time or 50 msec Repeat: $\pm 0.05\%$
Reset	Front, Remote, Power interruption (programmable)

### Output Specifications

Output Contact	DPDT (2 C/O)
Contact Rating	5A @ 230V AC

### Functional Specifications

Modes	ON delay / Interval delay
Time Ranges	0 - 9.99 sec
	0 - 99.9 sec
	0 - 999 sec
	0 - 99.9 min
	0 - 999 min
Counting Direction	0 - 99.9 hr
	Down


### Supply Voltage

Supply Voltage	85 to 270V (AC : 50 / 60Hz)
----------------	-----------------------------


### Environmental Specifications

Temperature	Operating: 0 to 50°C (32 to 122°F)
	Storage: -20 to 75°C (-4 to 167°F)
Humidity (non-condensing)	95% RH
Weight	140 gms
Protection Level	IP50 for faceplate

### Dimensions

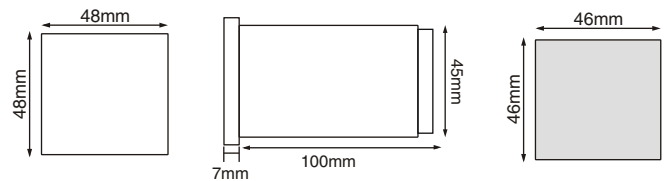

### Terminal Connections

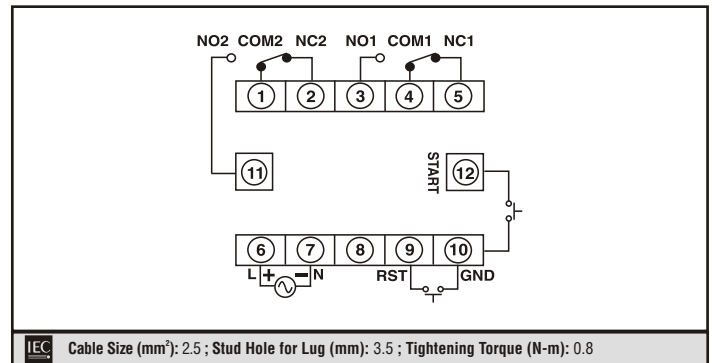

## Ordering Information

Part No.	Supply Voltage
XT56-N	85 to 270 V AC/DC

Timing Diagram

