

Prüfkopf - Datenblatt / Probe Data Sheet

P 1422.001

Data_P1422.001_DS6PB4-14.doc Lh 10.10

Senkrecht - Prüfköpfe

- Hand - Prüfung
- Schwinger Ø 6 mm
- Kontaktfläche Ø 8 mm
- Piezokeramik-Schwinger
- Breitbandig
- inkl. austauschbarem Polystyrol-Vorlauf

Straight beam probes

- Contact testing
- Element dia. 6 mm
- Contact area dia. 8 mm
- Piezoceramic element
- Broadband
- incl. exchangeable polystyrene delay line

**DS 6 PB 4-14**

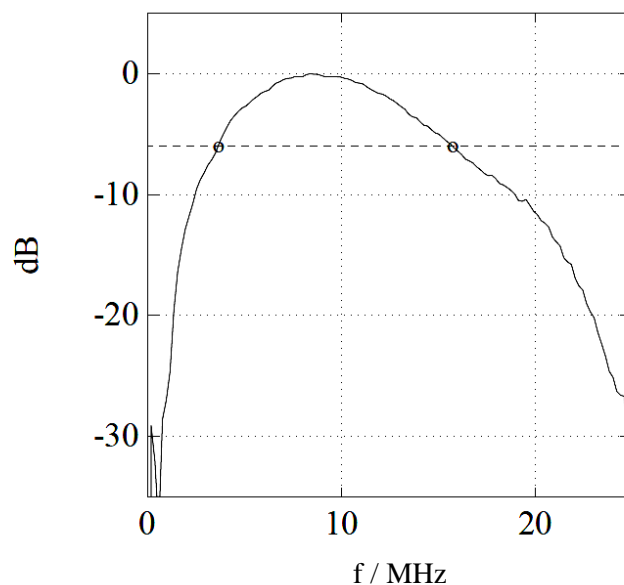
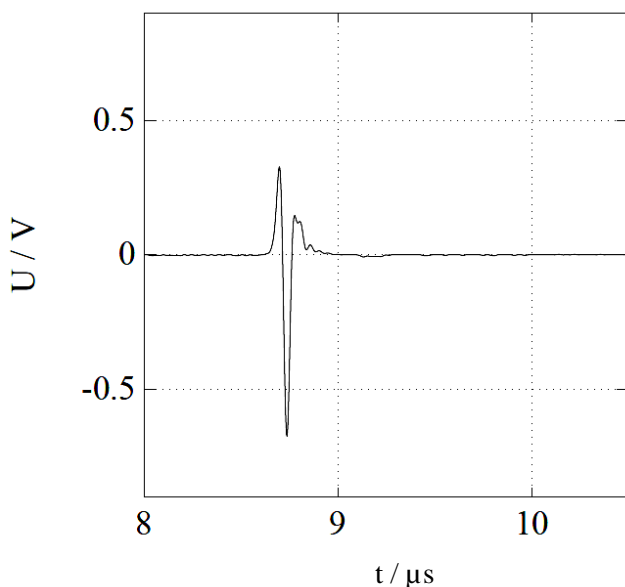
Bestell-Nr./ Order no.	1422.001
Schwingerfrequenz / frequency of element	20 MHz *

*auch in 5 MHz erhältlich / also available with 5 MHz

Schwinger Ø Element dia.	6,3 - 0,1 mm
Untere Grenzfrequenz (-6 dB) Lower cutoff frequency	4,0 ± 1,2 MHz
Obere Grenzfrequenz (-6 dB) Upper cutoff frequency	14,0 ± 2,5 MHz
Impulsdauer Pulse duration	0,2 ± 0,06 µs
Anschlussbuchse Female connector	Microdot

Arbeitstemperatur Operating temperature	-10°C – +60°C
Gehäuse Ø Housing dia.	16 mm
Gesamtlänge Total length	28 mm
Prüfkabel 2 m, Bestell-Nr. Connection cable 2m, order no.	1615.200
Gewicht Weight	14 g

Änderungen vorbehalten / Subject to change without notice

Impulsform und Spektrum / Pulse shape and frequency spectrum1. Echo 10 mm Polystyrol-Vorlauf / 1st echo 10 mm delay line