We reserve all rights to this drawing, to any patents or patent registrations related hereto, and to the duplication, retransmission by third parties and misc. use. Any use of this drawing is not permitted without the written consent of STABILUS.

Intended for internal use and customer

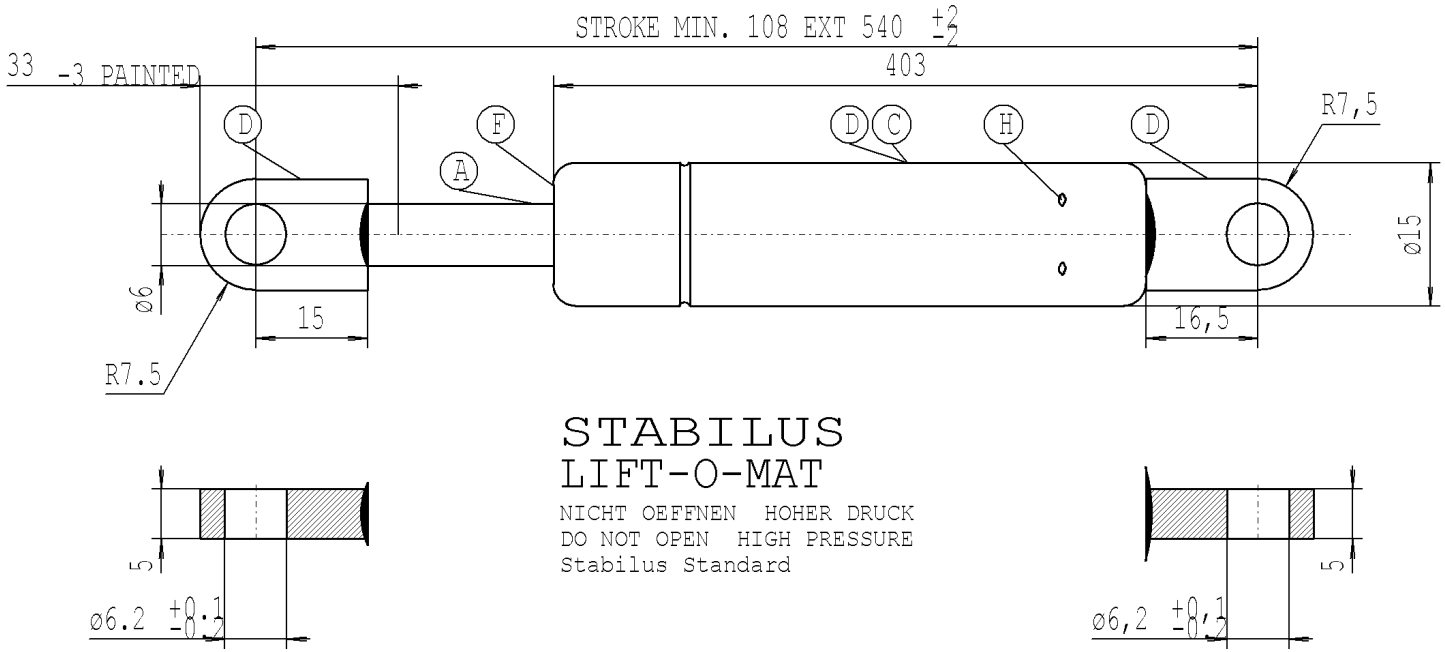

STABILUS
LIFT-O-MAT

NICHT OEFFNEN HOHER DRUCK
DO NOT OPEN HIGH PRESSURE
Stabilus Standard

- The warning label must not be removed or obscured.
- the Gas Spring must not be mechanically modified or damaged.
- Extension speed VS2=0,20-0,65 (m/s)

- compression and extension forces measured acc. to STAB-Spec. 10009033
- Extension speed measured according to STAB-Spec. 10005451
- Spring test with piston rod downwards

- Line up connections permissible deviation ± 5 DEG
- Protect piston rod from dirt, paint and damage
- Disposal acc. to STAB-Spec.10009375
- Drawing not true-to-scale
- Observe installation instructions according to STAB-Spec. 10005593
- Installation: With piston rod down to ensure best possible durability performance of the gas spring.

- Permissible operating temperature range -30°C to +80°C
- Component testing gas spring acc. STAB-Spec. 10010035

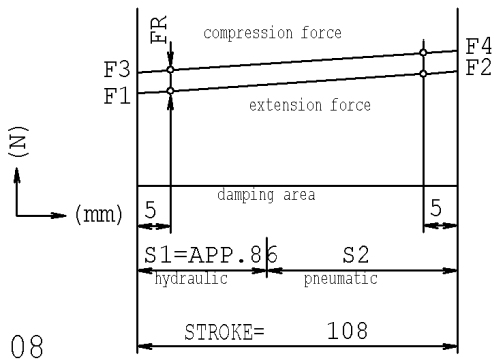

X=F2/F1=1,08
FRmax=F3-F1

A	Nislide black
C	print white
D	black painted
F	border flange oiled
H	dinks permissible

Forces (statically measured)

F1 (N)	F4 max (N)	FR max (N)
extension force 100±15	compression force 180	friction 50

CHANGE	
NEW	SERIE
OLD	VERSUCH
CHG.NO.	581231
NAME	01.07.10 SCHNASS
NO.	1

DIMENSIONS WITHOUT TOLERANCE +/-1

LIFT-O-MAT

03 01 0613 10 110

Unregistered Copy
Print-out is not subject to the modification service

STABILUS

Modifications in favour of technical process reserved

DRAWING		CHECKED
DATE 29.04.2010	NAME BIRIS A.	

Document No. 10172611

222750

E

***** Druckdatum: 30.11.2017 / 05:39:26 ***** Ausdruck nicht massoetreu *****