

## Standard Ballasts 18–58 W, 240 V

### For compact fluorescent lamps


Casing: vacuum-impregnated  
with polyester resin

Connection: push-in terminal for leads  
0.5–1 mm<sup>2</sup>; for the automatic  
luminaire wiring IDC terminals  
for leads H05V-U 0.5

Winding temperature: tw 130



# CFL BALLASTS

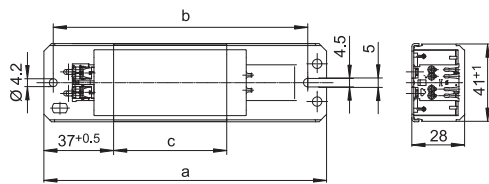

Ref. No.	Type	Voltage/ frequency V, Hz	For lamps			Current mA	Dimensions			Weight kg	Δt/Δtan. K	Energy efficiency	Capacitor	
			Output W	Type	Base		a mm	b mm	c mm				CP μF	Current mA
533043	LN 18.162	240, 50	18	TC-F/TC-L	2G10/2G11	370	150	140	60	0.55	60/110	B2	4.5	120
			18	TU	2G13	370	150	140	60	0.55	60/110	B2	4.5	120
			24	TC-F/TC-L	2G10/2G11	345	150	140	60	0.55	60/110	B2	4.5	150
			26	TC-D/TC-T	G24d-3/GX24d-3	325	150	140	60	0.55	60/110	B1	4.5	150
			28	TC-DD	GR8/GR10q	320	150	140	60	0.55	60/110	B1	3.5	150
164353	LN 181.418	240, 50	18	TC-D/TC-T	G24d-2/GX24d-2	220	85	75	34	0.28	60/130	B1	2.0	110
164566	LN 18.507	240, 50	18	TC-F/TC-L	2G10/2G11	370	155	140	92	0.80	35/60	B1	4.5	120
			18	TU	2G13	370	155	140	92	0.80	35/60	B1	4.5	120
			24	TC-F/TC-L	2G10/2G11	345	155	140	92	0.80	35/60	B1	4.5	150
534627	L 18.936*	240, 50	18	TC-F/TC-L	2G10/2G11	370	150	140	45	0.43	70/140	—	4.5	120
			18	TU	2G13	370	150	140	45	0.43	70/140	—	4.5	120
			24	TC-F/TC-L	2G10/2G11	345	150	140	45	0.43	70/140	—	4.5	150
			28	TC-DD	GR8/GR10q	320	150	140	45	0.43	70/140	—	3.5	150
535778	LN 2x18.135	240, 50	2x18	TC-F/TC-L	2G10/2G11	400	150	140	45	0.43	65	B1	4.0	210
547145	LN 21.293	240, 50	21	TC-DD	GR10q	260	105	95	45	0.41	55	B1	3.0	120
545405	LN 26.238	240, 50	26	TC-D/TC-T	G24d-3/GX24d-3	325	105	95	45	0.41	55/145	B2	3.5	140
527196	LN 36.201	240, 50	2x18	TC-F/TC-L	2G10/2G11	400	150	140	60	0.55	55/140	B1	4.0	210
			36	TC-F/TC-L	2G10/2G11	430	155	140	60	0.55	55/140	B2	4.5	210
			36/40	TU/TR	2G13/G10q	430	150	140	60	0.55	55/140	B2	4.5	210
			38	TC-DD	GR10q	430	150	140	60	0.55	55/140	B2	4.5	210
164555	LN 36.505	240, 50	2x18	TC-F/TC-L	2G10/2G11	400	155	140	92	0.80	40/95	B1	4.0	210
			32	TR	G10q	450	155	140	92	0.80	40/95	B1	4.0	220
			36	TC-F/TC-L	2G10/2G11	430	155	140	92	0.80	40/95	B1	4.5	210
			36/40	TU/TR	2G13/G10q	430	155	140	92	0.80	40/95	B1	4.5	210
164438	L 36/40.443*	240, 50	36	TC-F/TC-L	2G10/2G11	430	150	140	60	0.55	65/155	—	4.5	210
			36/40	TU/TR	2G13/G10q	430	150	140	60	0.55	65/155	—	4.5	210
			38	TC-DD	GR10q	430	150	140	60	0.55	65/155	—	4.5	210
164560	LN 58.506	240, 50	58	TU	2G13	670	233	220	160	1.31	35/85	B1	7.0	320
507936	LN 58.192	240, 50	58	TU	2G13	670	190	180	110	0.95	50/150	B2	7.0	320
534252	LN 58.722	240, 50	58	TU	2G13	670	190	180	92	0.80	60/180	B2	7.0	320

\* Ballasts without CE marking for replacements or markets outside of the EU