




SPV 6.7 B [SPV050B02B05AA]

3 PH - 4 poles - 1500 RPM - 220-240/380-415 V - 50 Hz

Working moment [Kg*cm]	Unbalance [Kg*cm]	Centrifugal force [Kg]	Nominal voltage [V]	Input power [kW]	Current [A]	Power Factor	Ia/In
60	30	750	220-240/380-415	0,55	Δ 1,73 Y1	0,87	4

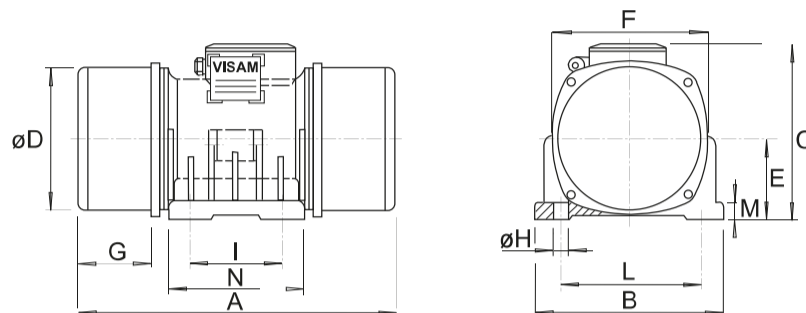

OVERALL DIMENSIONS [mm]													
Weight [Kg]	H	I	L	Holes number	A	B	C	E	F	G	N	P	Q
27	17	115	170	4	390	220	168	96	184	81	200	65	50

TECHNICAL FEATURES						
Type of grease	Greased for life	Screw	Washer	Clamping torque [Nm]	Cable type	Cable gland
/	No	M16	17 x 30 mm	185	/	/

BEARINGS				
Bearing model	Type	Life 100%	Life 80%	Life 50%
NJ 305		10214	19949	>100000

CERTIFICATION	
Atex II 3D Ex tc IIIc T140°C IP66	

REV.2-22/05/2019