

HIGH-TORQUE ANGLE TOOLS

FEATURES AND BENEFITS

- Transducerized closed loop control at the output like all AcraDyne HT-Series tools
- These low-profile head, small-diameter, lever-operated tools, with the torque measured at the output, offer a unique solution
- The torque reported is the torque delivered
- Smallest tools of their kind on the market
- Same durable, high-cycle gearing as our other HT-series tools
- Models up to 17,000 Nm available upon request



AEN3571000A



AEN356540A




AEN3571600A



AEN3572600A

SPECIFICATIONS

| MODEL | MAX. TORQUE* | | TORQUE RANGE | | FREE SPEED RPM | WEIGHT | | OUTPUT DRIVE |
|-------------|--------------|-------|--------------|-------------|-------------------|--------|------|-------------------|
| | NM | FT-LB | NM | FT-LB | | LB | KG | |
| AEN356540A | 540 | 398 | 135 - 540 | 100 - 398 | 109 | 13.1 | 5.95 | 3/4" Square Drive |
| AEN3571000A | 1,000 | 737 | 250 - 1,000 | 184 - 737 | 61 | 16.3 | 7.39 | 1" Square Drive |
| AEN3571600A | 1,600 | 1,180 | 400 - 1,600 | 295 - 1,180 | 33 | 16.7 | 7.57 | 1" Square Drive |
| AEN3572600A | 2,600 | 1,917 | 650 - 2,600 | 479 - 1,917 | 21 | 18.5 | 8.40 | 1" Square Drive |

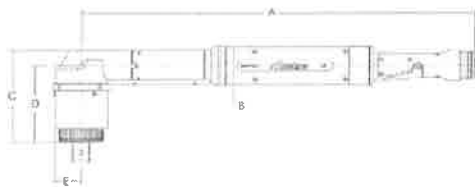

| DIMENSIONS | A | | B | | C | | D | | E | |
|-------------|-------|-------|------|------|------|-------|------|-------|------|------|
| | IN | MM | IN | MM | IN | MM | IN | MM | IN | MM |
| AEN356540A | 22.58 | 573.6 | 2.31 | 58.7 | 4.75 | 120.6 | 4.05 | 102.8 | 1.33 | 33.7 |
| AEN3571000A | 22.92 | 582.2 | 2.31 | 58.7 | 5.36 | 136.1 | 4.44 | 112.7 | 1.53 | 38.7 |
| AEN3571600A | 22.92 | 582.2 | 2.31 | 58.7 | 5.36 | 136.1 | 4.44 | 112.7 | 1.53 | 38.7 |
| AEN3572600A | 22.92 | 582.2 | 2.31 | 58.7 | 6.77 | 171.9 | 5.86 | 148.8 | 1.53 | 38.7 |