


Specifications

- Magnetic Filters are used for filtration of iron particles in hydraulic circuits in cooling systems.
- It functions semi permanently, and therefore zero running cost.
- Maintenance Free for a long time.
- Easy to install.
- Available SMG-100-P70 (Thread bolt P.C.D. 70mm)

Part Number	A (mm)	B (mm)	C (mm)	D (mm)
SMG- 25	100	70	35	35
SMG- 50	130	100		65
SMG-100	200	135		65

Part Number	Tank Capacity (Liter/EA)	Weight (Kg)
SMG- 25	20	0.6
SMG- 50	50	1.3
SMG-100	100	2.3

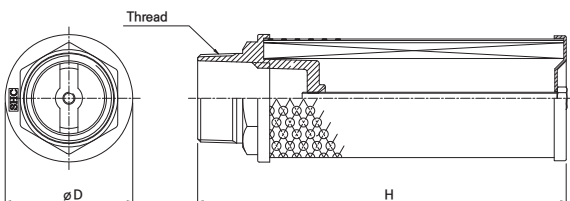

Specifications

- Connection Material : Aluminum
- End cap Material : Steel
- Working pressure : 0~9.9 Bar
- Working temp. : 5~60°C
- Silence Effect : 30dB
- The air resistance is low.
- Compact and easy to install.

Part Number	Thread	D (mm)	H (mm)	Effective Sectional Area	Silence Effect
SAN-06	PT 3/4"	47	105	160mm ²	30dB<
SAN-08	PT 1"	47	125	270mm ²	
SAN-10	PT 1 1/4"	74	185	440mm ²	
SAN-12	PT 1 1/2"	74	205	590mm ²	
SAN-16	PT 2"	86	250	960mm ²	
SAN-20	PT 2 1/2"	109	360	1,500mm ²	