



**Electric Duo Pump | SR 20 DC 2**

**Specifications**

article number		150.152.730
model		SR 20 DC 2
equipped with (connector type)		CORE
max. working pressure	psi	10443
short description		Electric Duo Pump
number of stages		3
first stage output / min.	oz	101.4
second stage output / min.	oz	45.6
third stage pressure range min.	psi	4061
third stage pressure range max.	psi	10443
third stage output / min.	oz	19.44
sound emission (acc. to EN 13204)	dB(A)	77
sound emission (unloaded)	dB(A)	73
capacity oil tank	oz	146.8
capacity oil tank (effective)	oz	135.3
operator type		electric motor
number of tool connections		2
number of tools simultaneously usable		2
pump type		3-stage axial pump
engine		230 VAC - 1.8 kW - 50 Hz - 1 Ph
required power	KVA	7.2
weight, ready for use	lb	75.0
temperature range	°F	-4 + 131
dimensions (AxBxC)	in	17.9 x 12.4 x 18.1
EN 13204 classification		MTO
NFPA 1936 compliant		Yes

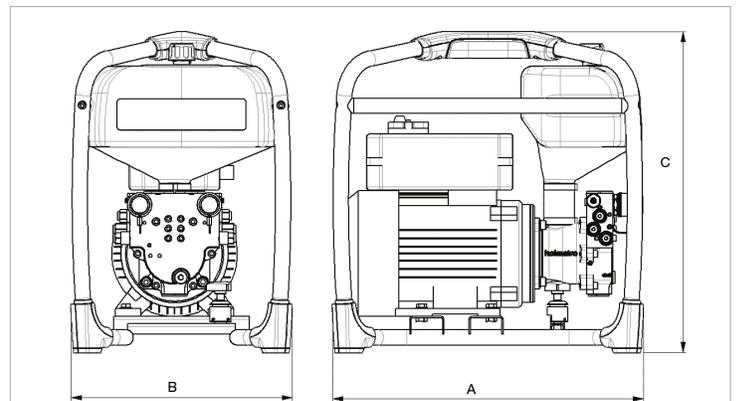

**3-stage pump technology**

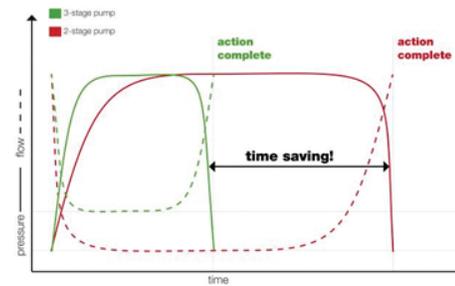

Time required to cut a typical B-pillar using a Holmatro NCT™ II cutter connected to a 2-stage or a 3-stage pump.

**Standard supplied with**

- CORE Technology
- Quicker (saves time)
- Safer (more user-friendly)
- Easier (allows more efficient use of manpower)

**Accessories**

CORE Elbow Connector	150.182.176
LED Light Spider Range	590.000.343